



## FL Series- 2

### Technical Specification

Total Lighting output: 700 LM/ 1400 LM/2100 LM/  
3500 LM/7000 LM/ 8400 LM

Power Factor: >0.95PF

Operating Temperature: -30°~50°


Protection Level: 65 IP

Life Time: 30000 hrs

Die cast aluminium body

Aluminium reflector

Tempered glass

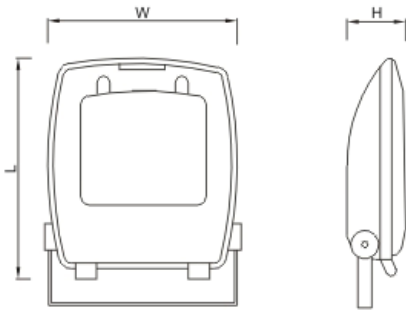

Sl	Model	L (mm)	W (mm)	H (mm)
1	10W	184	167	55
2	30W	293	240	82
3	50W	358	320	106
4	100/120 W	422	380	128
5	200 W	620	480	155

Model	Power	Input Voltage	Color Temperature	CRI	Luminaires efficiency
FLC-10-SS2157	10W	90-260 V/ 50Hz	3000 / 6000 K	>70 RA	75LM/ W
FLC-20-SS2157	20W				
FLC-30-SS2157	30W				
FLC-50-SS2157	50W				
FLC-100-SS2157	100 W				
FLC-120-SS2157	120 W				
FLC-200-SS2157	200 W				

