



## PLE Series- 1

### Technical Specification

12.5mm Ultra-thin Design

Pb Free

CE & ROHS Compatible

LED - SMD2835

CRI: ≥80


Color - 3000 K / 4000 K / 5000 K / 6000 K

Beam Angle: 120°

Class II Insulation

Working environment: 10~80%RH, -20°C~40°C

Life : 30000 Hrs.

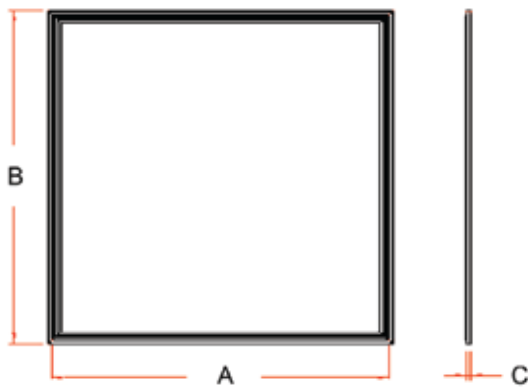

Model	A (mm)	B (mm)	C (mm)
PLE-12-SW3030	295	295	12.5
PLE- 20-SW 6030	595	295	12.5
PLE-36-SW3012	1195	295	12.5
PLE-36-SW 6060	595	595	12.5
PLE-60-SW 6012	1195	595	12.5

Model	Color	CCT	Lumen	LED Chips	Power
PLE-12-SW3030	Cool White	5500-6500 K	960 lm	60 pcs 2835smd	12W
	Natural White	4250-4750 K	900 lm		
	Warm White	2800-3200 K	820 lm		
PLE- 20-SW 6030	Cool White	5500-6500 K	1600 lm	96 pcs 2835smd	20 W
	Natural White	4250-4750 K	1480 lm		
	Warm White	2800-3200 K	1350 lm		
PLE-36-SW3012	Cool White	5500-6500 K	2880 lm	192pcs 2835smd	36 W
	Natural White	4250-4750 K	2750 lm		
	Warm White	2800-3200 K	2620 lm		
PLE-36-SW 6060	Cool White	5500-6500 K	2880 lm	192pcs 2835smd	36 W
	Natural White	4250-4750 K	2750 lm		
	Warm White	2800-3200 K	2620 lm		
PLE-60-SW 6012	Cool White	5500-6500 K	4800 lm	300 pcs 2835smd	60 W
	Natural White	4250-4750 K	4560 lm		
	Warm White	2800-3200 K	4250 lm		